



Conn.1




5xM12*1.0

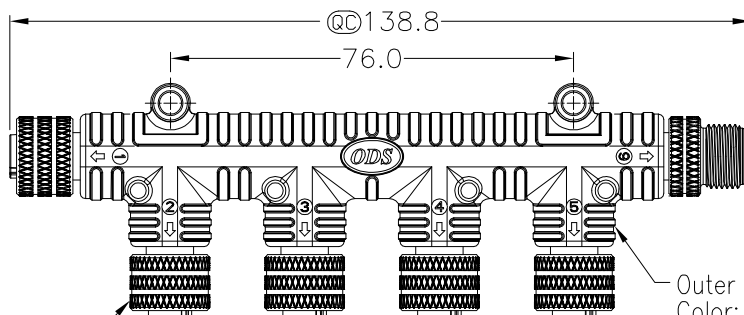

Outer Mold
Color: Black



Conn.6

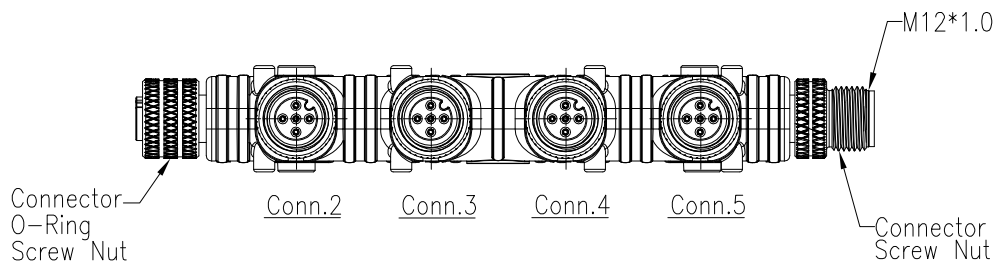



Conn.1~5

Pin Assignments Front View

Conn.6

Pin Assignments Front View

| | | | | | |
|---------|--------|--------|--------|--------|--------|
| | | | | | 5 |
| | | | | | 4 |
| | | | | | 3 |
| | | | | | 2 |
| | | | | | 1 |
| Conn.1 | Conn.2 | Conn.3 | Conn.4 | Conn.5 | Conn.6 |
| Pin Out | | | | | |

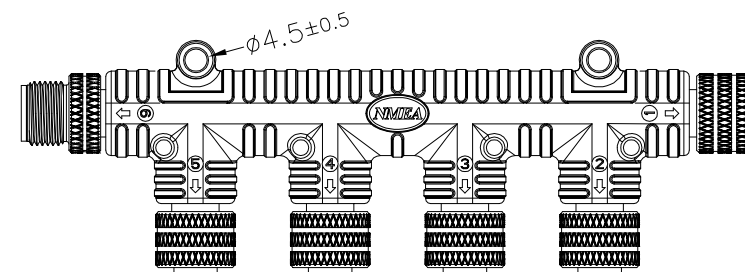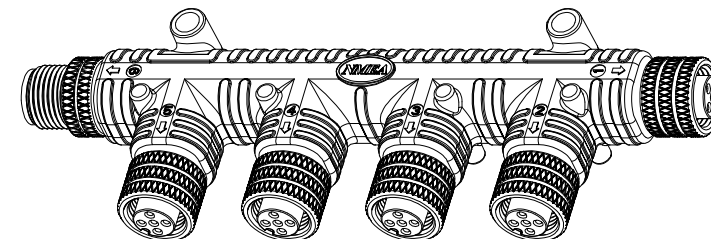

Note:

- Waterproof Rate: IP67
(No Ingress of Dust/ Protected Against Harmful Effects Caused In 1 Meter Water Within 30 Minutes)
- Temperature Range: -20°C to +80°C
- Current Rating: 5A
- Material:
Housing: Nylon, Black
Pin: Copper Alloy, 30u" Gold Plated
Screw Nut: Brass, Nickel Plated

ODS 歐德斯電通科技股份有限公司

| | | | | | |
|-------------------------------------|----------------|-----------------|------------------------------|--------------------|--|
| TITLE NMEA,MICRO-C,4 WAY ADAPTOR | | | | | |
| QC : QC check | | DSGN Reg | PART NO. NAW-MM1MF1MF4001 | | |
| TOLERANCE ±0.50 | SCALE 1 : 1 | DWN. Nancy | DATE 2016/01/18 | | |
| | UNIT: mm | CHKD. Miller | DATE 2016/01/18 | | |
| | SHEET 1 of 1 | REV. A | APVD. Reg | DATE 2016/01/18 | |