

FURUNO TECH TIPS


We take pride in supporting the best marine technical dealers in the industry. We know communication is the key to ensuring you can provide the best possible service to your customers. To that end, we'll periodically be providing useful "Furuno Tech Tips." These tips are focused on lesser known features or troubleshooting items that could result in overall higher quality of service. We hope you'll save and refer to these tech tips, as well as providing copies to your field personnel.

NavNet TZTBB: Install Tips For MCU002 & MCU004 Control Units

March 7, 2018
Tech Tip #2018-01

Furuno offers two very useful control units for the NavNet TZtouch product line; these are the [MCU002](#) and the [MCU004](#). There are some important things to remember when connecting these control units to the TZTBB.

Not all TZTBB USB ports are created equal. There is a distinct priority of USB connections for the TZTBB Black Box MFD. We have determined the MCU002 or MCU004 work best when connected directly to the main "Common USB Port" of the TZTBB. This port has a higher priority than the others, resulting in better response time. Please note our recommendations when connecting USB devices to the TZTBB USB Ports (see below).

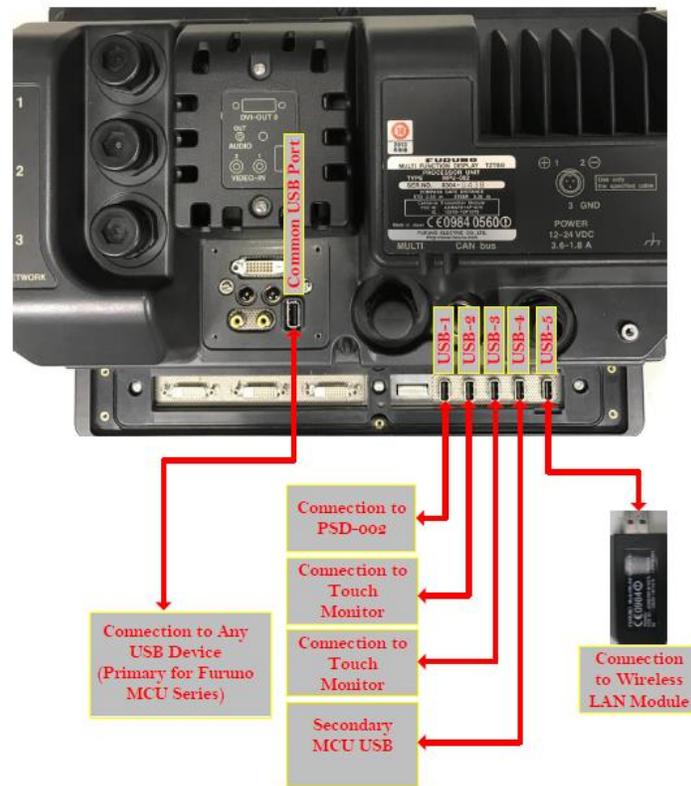

TZTBB processor shown, with USB port location and recommend usage

We look forward to providing you more of these useful technical tips in the future.

Furuno USA, Inc.